

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/11/19

DATE CODE: YWWD  
 Y= YEAR (2020)  
 WW= WEEK (01-52)  
 D= DAY (1-7)

**SPECIFICATION:**


1. ELECTRICAL
  - 1.1 Current Rating: 0.5A per pin
  - 1.2 Voltage Rating: 10V DC
  - 1.3 Contact Resistance: 100mΩ Max.
  - 1.4 Insulation Resistance: 1000MΩ
  - 1.5 Dielectric Withstanding Voltage: 500VAC
2. MECHANICAL
  - 2.1 Durability: 5,000 cycles
  - 2.2 Contact Normal Force: 0.5N Max. per pin
  - 2.3 Tray Lock Force: 3N Min.
3. ENVIRONMENTAL
  - 3.1 Operating temperature range: -40°C~+85°C
  - 3.2 Storage temperature range: -40°C~+85°C
4. SOLDER ABILITY
  - 4.1 Recommended IR-Reflow Temperature: 260°C

This part (115U-B100) is a connector only, it should be used together with Nano SIM Tray (115U-T003)

*	115U-T003	Card tray with Nano SIM on double side, used for 115U-B100, PC+ABS, Black, Reel
---	-----------	---


6	CRANK	Stainless Steel
5	SPRING	SWP-B, Nickel plating
4	SLIDER	LCP, UL94V-0, Black
3	SHELL	Stainless Steel, Nickel plating
	SIM2	Contact: Phosphor Bronze, Gold plating over Nickel
2	MOLDING	Insulator: LCP, UL94V-0, Black
	SIM1	Contact: Phosphor Bronze, Gold plating over Nickel
1	MOLDING	Insulator: LCP, UL94V-0, Black

NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
www.attend.com.tw					
DRAWN	Fros	2021/07/23	DRAWN NAME: Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel		
CHECKED	Tim	2021/07/23			
APPROVED	Ken	2021/07/23	PRODUCT NO. 115U-B100		
SCALE	2/1	SHEET	1/4	FILE NAME	115U-B100_B_1
					A4



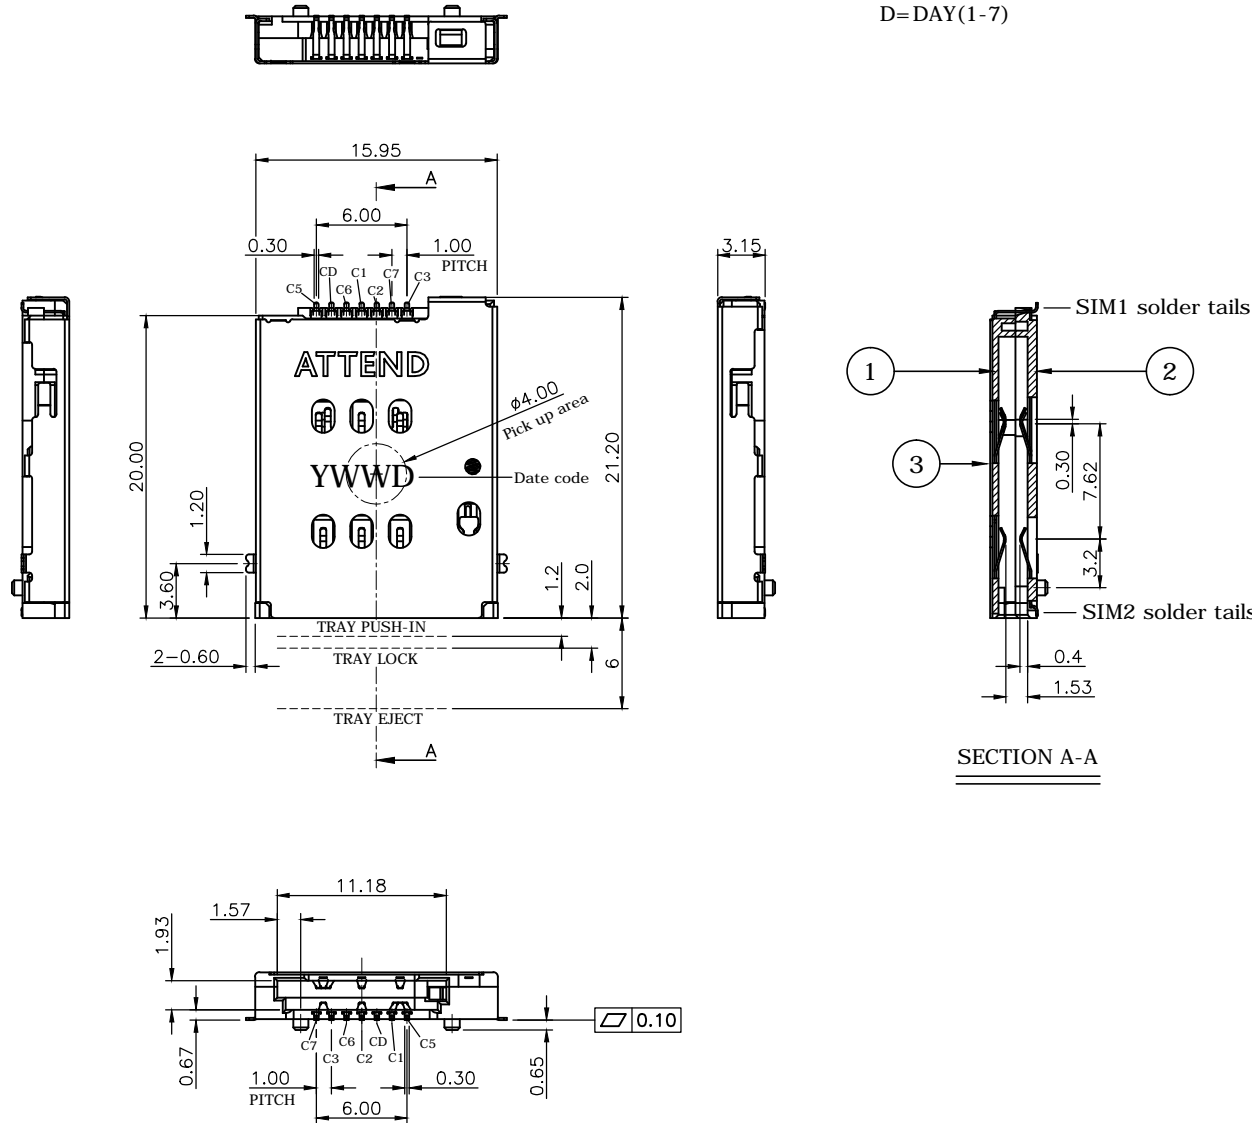


REV.	DESCRIPTION	DRAWN	DATE
	see sheet one		

### Nano SIM pin assignment






Pin NO.	Pin Name
C 1	VCC
C 2	RST
C 3	CLK
C 5	GND
C 6	VPP
C 7	I/O
CD	Card Detect Switch

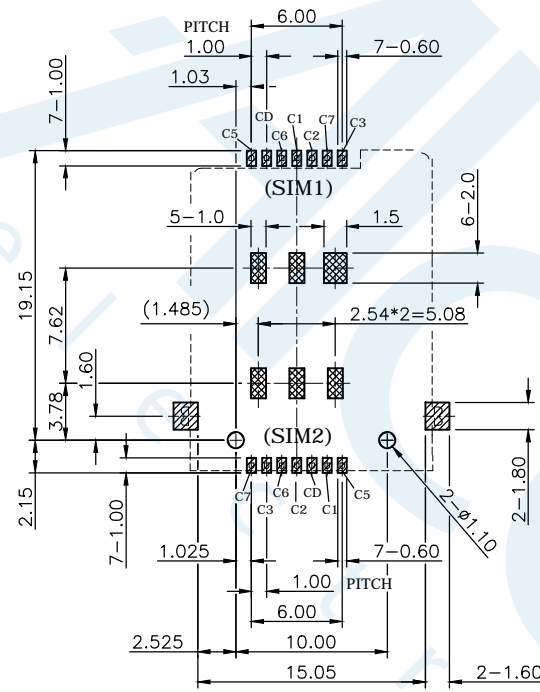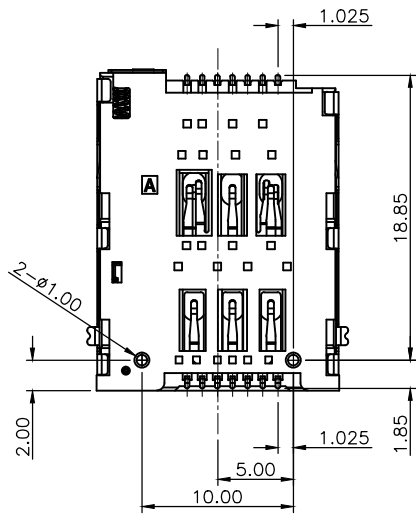




RECOMMENDED LAYOUT (TOP VIEW)  
GENERAL TOLERANCE: ±0.05mm

### Card Detect circuit: (Normal OPEN)

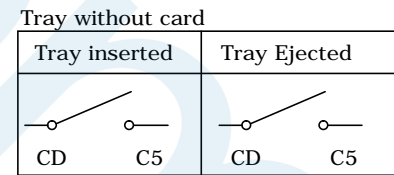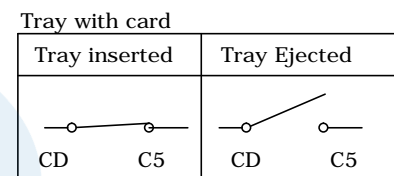


UNLESS OTHERWISE SPECIFIED TOLERANCE				 www.attend.com.tw
UNIT:	DECIMAL	LINEAR	ANGLES	
mm	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
DRAWN	Fros	2021/07/23	DRAWN NAME:	
CHECKED	Tim	2021/07/23	Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel	
APPROVED	Ken	2021/07/23	PRODUCT NO. 115U-B100	
SCALE	SHEET	SIZE	FILE NAME	
2/1	2/4	A4	115U-B100_B_1	

REV.	DESCRIPTION	DRAWN	DATE
	see sheet one		

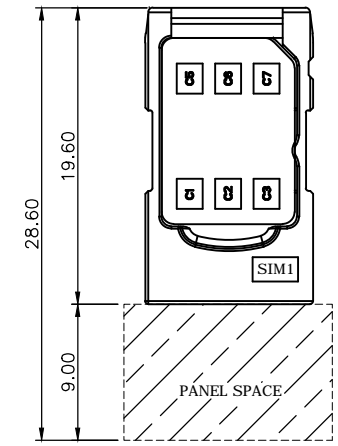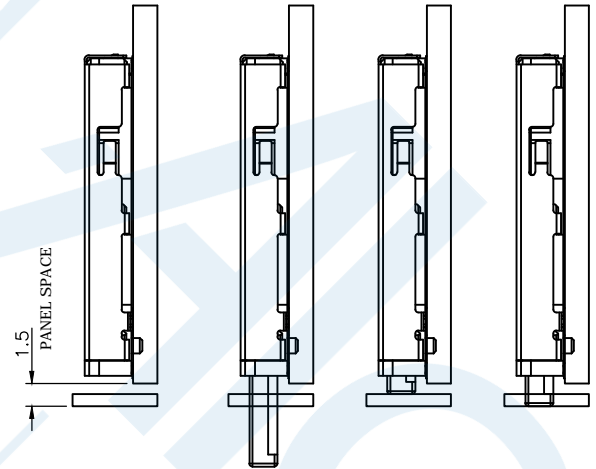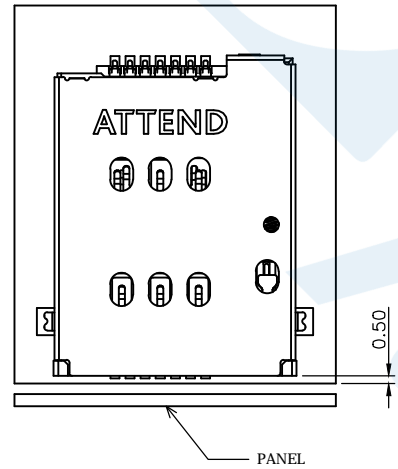

Length and form can be customized within 9.0mm.

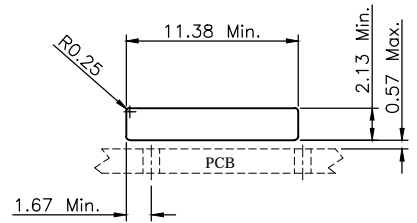

RECOMMENDED PANEL CUT OUT

Panel space & tray length

P/N	Length	PANEL SPACE
115U-T003	19.6mm	1.5
Reserved	19.6~28.6mm	1.5~10.5

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°


**ATTEND**  
www.attend.com.tw

DRAWN	Fros	2021/07/23	DRAWN NAME:
CHECKED	Tim	2021/07/23	Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel
APPROVED	Ken	2021/07/23	PRODUCT NO. 115U-B100
SCALE	2/1	SHEET 3/4	SIZE A4
FILE NAME			115U-B100_B_1



REV.	DESCRIPTION	DRAWN	DATE
	see sheet one		

Nano SIM card assembly and disassembly:


ASSEMBLY

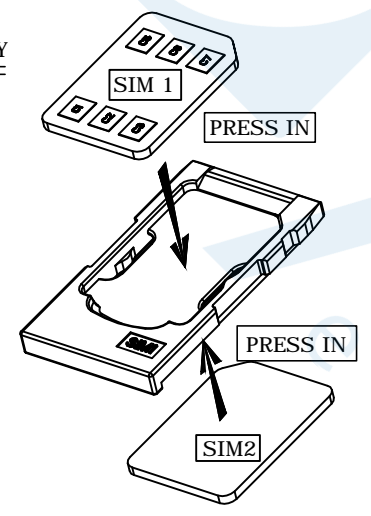



DISASSEMBLY

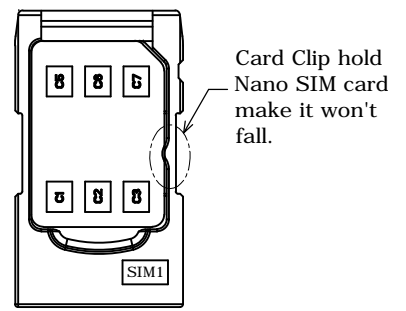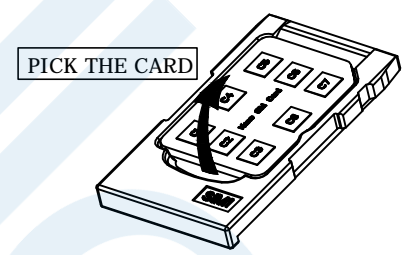


SIM1

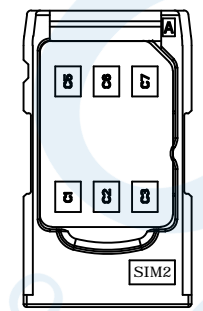

SIM2

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°	www.attend.com.tw	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2021/07/23	DRAWN NAME:		
CHECKED	Tim	2021/07/23	Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel		
APPROVED	Ken	2021/07/23	PRODUCT NO.	115U-B100	
		SCALE 2/1	SHEET 4/4	SIZE A4	FILE NAME 115U-B100_B_1

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/07/23

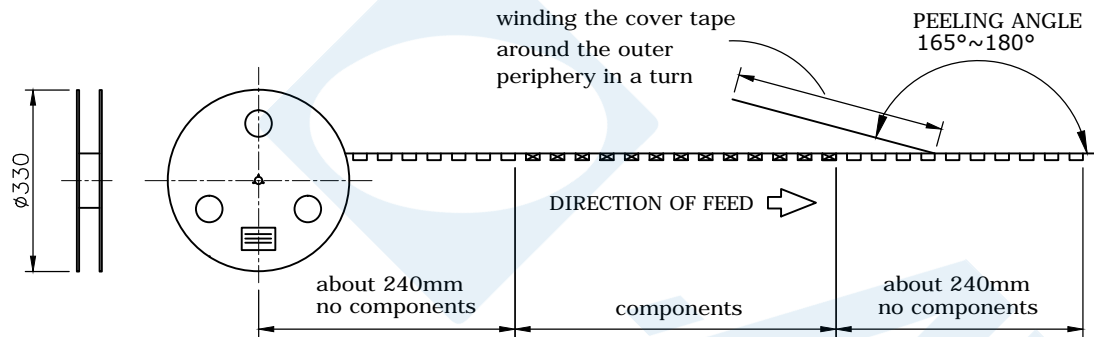



## PACKAGING SPECIFICATION:

### 1. MATERIAL

- 1.1 Embossed Carrier Tape: PS Black
- 1.2 Top Cover Tape: PET 20-80g (Peel Speed 300mm/Minute)
- 1.3 Taping Reel: Paper

### 2. PACKING

- 2.1 Quantity:
  - 550 Piece/Reel
  - 3300 Piece/Outer Carton

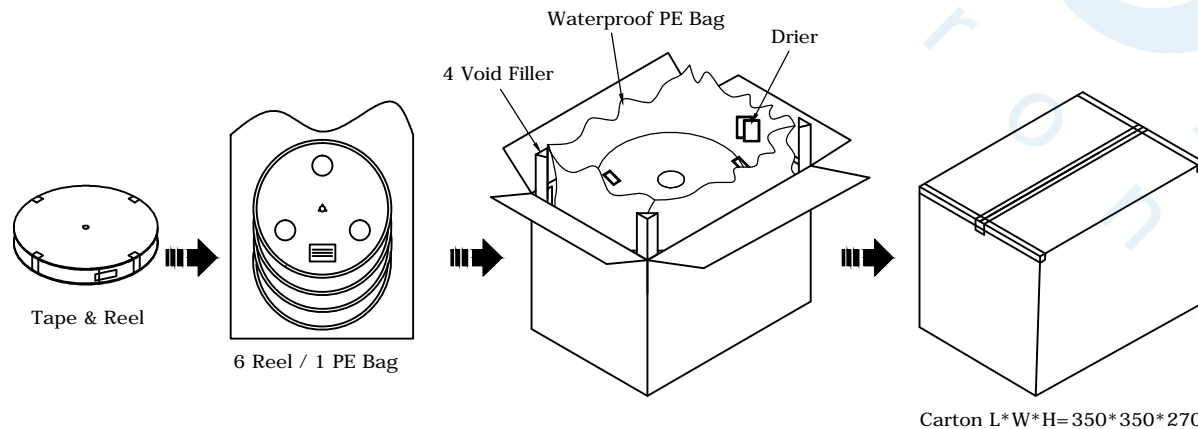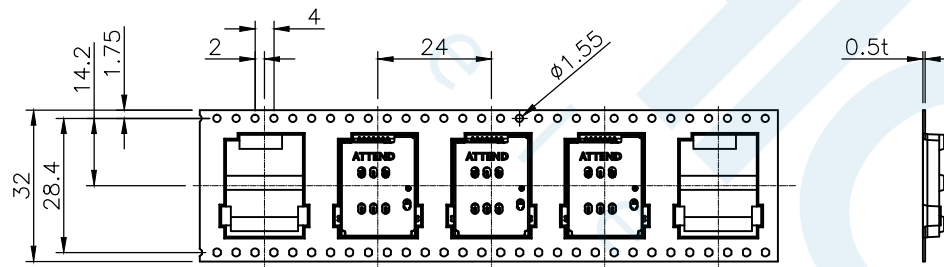

**Alcom** Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be  
 electronics Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



www.attend.com.tw

DRAWN	Fros	2021/07/23	DRAWN NAME:	
CHECKED	Tim	2021/07/23	Dual Nano SIM Socket,	
APPROVED	Ken	2021/07/23	Tray-Push Push, Lock w/Switch, G/F, Reel	
SCALE	N/A	SHEET	PRODUCT NO.	115U-B100
		1/1	FILE NAME	115U-B100_D_1
		SIZE		
		A4		