

5050 STRIP LED 98 LED/m 16,32W/m 5m DOT FREE RGB (10mm)

DATI TECNICI / SPECIFICATIONS:

LED: 98 LED/m
Strip dimension: 10 x 15 x 5000 mm
Working voltage: 24VDC
IP: 65
Power: 16,32W/m
Luminous flux: 350 lm/m
Module dimension: 71,4 mm
LED distance: 10,2 mm
Working temp.: -20 +45°C
Stocking temp.: 0 +60°C




IP67 AVAILABLE

LIFETIME EXPECTANCY
 ($L_{30}B_{10}$) 36000 hrs @ Ta 45°C

Garanzia / Warranty **3 anni years**



COD.	DESCRIZIONE / DESCRIPTION	IP	CRI	CCT (K)	MOD. LED	VOLTAGE	POWER	LUMEN
3SLXDFBRG4902000	STRIP 490 LED/m RGB DOT FREE 81,6W IP65	65	/	RGB	5050	24VDC	81,6W	1750



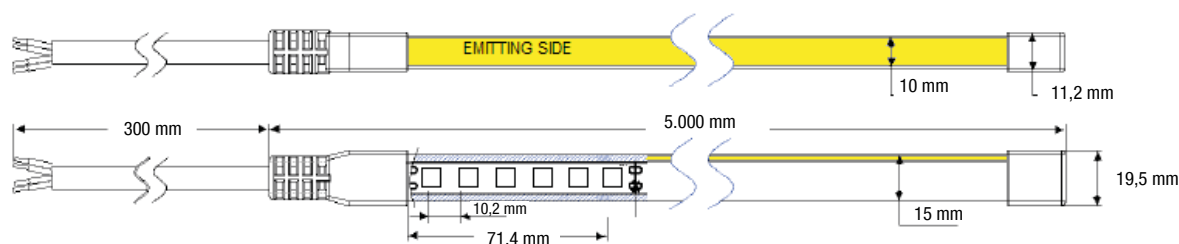


IP67 DIMENSIONI - IP67 DIMENSION

FRONT CAP



END CAP



SET ACCESSORI FULL SET ACCESSORY

- n.1 Cavo / Cable
- n.1 Tappo frontale / Front cap
- n.1 Tappo finale / End cap
- n.10 Clip in plastica / Plastic clip
- n.10 Viti / Screw



Tagliare ogni 71,4mm
 CUT every 71,4mm



ATTENZIONE / WARNING: Per la tipologia e la potenza espressa dalla strip, si raccomanda di dotare la stessa di adeguata dissipazione e di incollarla utilizzando il biadesivo termico conduttivo direttamente sulla superficie dissipante. (Due to the heating generated, it is recommended to dissipate it in a properly dissipating aluminum surface.)