

Empowered by **FRIWO**



**WE ACCELERATE E-MOBILITY**

# Technology

We supply all the components required for a modern electric powertrain.

1. Display
2. Vehicle Control Unit
3. Drive Unit
4. Motor Controller
5. Battery
6. Charger
7. Service Software



As a system provider, FRIWO offers digitally controllable, precisely matched power supply and drive solutions from a single source.





## CHARGER

Innovative charging concepts for maximum mobility: Equipped with the experience of almost half a century, FRIWO is your ideal partner in charging technology.

Regardless of whether you require highest performance, convection cooling, temperature monitoring, active battery balancing or communication via BUS systems, our comprehensive expertise in the field of charging technology will help you find the perfect solution for your specific needs.

## FULL POWER, LOWER CONSUMPTION

Coming from a market-leading position in the field of e-bike charging technology, we are more than familiar with the requirements of an optimal power supply for light electric vehicles. In addition to the shortest possible charging times for limitless electromobility, maximum user-friendly handling, exceptional operational lives and safety issues are of central importance for the design of our devices. Tailor-made for „green“ electric mobility, it goes without saying that our highly efficient charging systems offer minimal standby losses with the aim of achieving „zero standby“.

Dealing with the future of electromobility, FRIWO as an innovative company is also constantly exploring new power supply concepts. In the field of contactless energy transmission, which could represent the charging infrastructure concept for electric vehicles of the future, we have already realized efficient inductive charging systems featuring parallel data transfer.

## OVERVIEW

<b>Input Voltage</b>	90 - 264 VAC
<b>Input Frequency</b>	47Hz - 63Hz
<b>Efficiency</b>	> 93%
<b>Power factor pF</b>	> 0,98
<b>Output Voltage</b>	29 - 60V
<b>Output current</b>	0 - 7000mA
<b>Communication</b>	CAN
<b>Authentication</b>	OPTIGA TRUST
<b>Protection</b>	OVP, OCP, OTP
<b>Safety</b>	IEC / EN 60335-1 & IEC / EN 60335-2-29
<b>Water protection</b>	IPX4
<b>Operation Temperature</b>	-20 °C - 55 °C

## VIEWS





## DISPLAY

The weatherproof display is easy to read, even in direct sunlight, and keeps the driver up to date at all times. Due to the open CAN bus interface, other displays can also be integrated into our powertrain. If a vehicle does not require a fixed display, a smartphone equipped with our Emerge EV App can be used instead.

## ■ DISPLAY FOR LIGHT ELECTRIC VEHICLES

The display has all the essential display elements and signal or warning lights that can be expected from an electric vehicle. The display values are updated absolutely without delay and in very high quality.

In addition, we have incorporated features that make the vehicle and the interaction with the driver even more exciting. The bar graph above the speed indicator can be operated variably and enables the display of a wide variety of information, such as the remaining overboost.


The IP67-protected display is splash-proof and can be installed outdoors.

## ■ OVERVIEW

<b>Supply voltage</b>	12V
<b>Backlight</b>	Yes
<b>Center display</b>	Speed, Ride mode, Boost, Temperature, State of charge, Milage, Trip milage
<b>Icons (lower edge)</b>	Indicators, Low beam, High beam, Charge mode, Low battery warning, On/Off
<b>Bottom line</b>	Voltage, Temperature, Time, etc.
<b>Buttons</b>	Switch bottom line, Trip reset

## ■ VIEWS



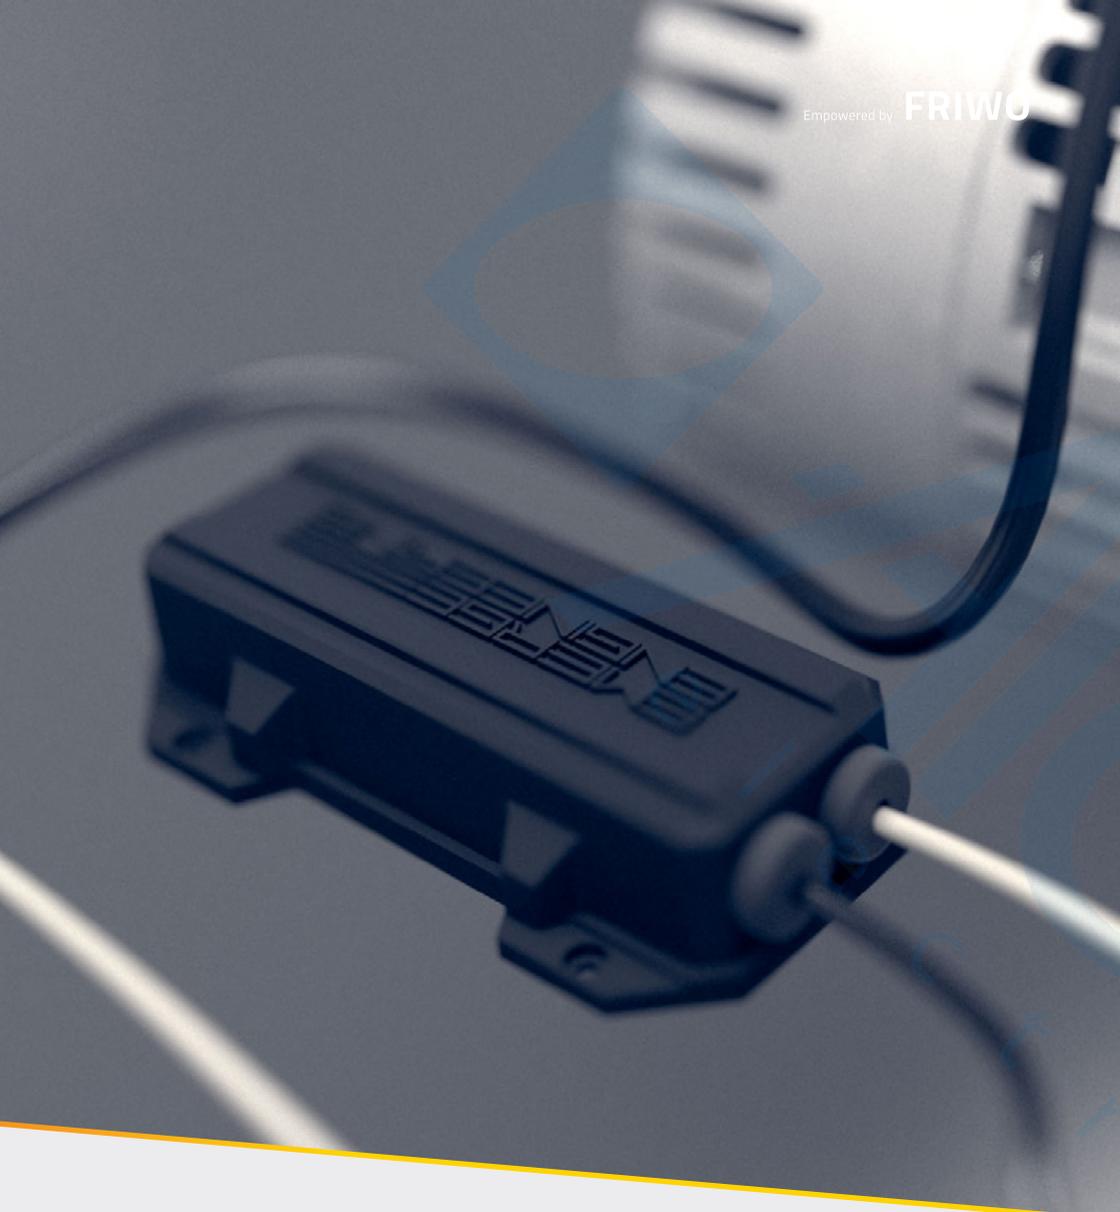

## VEHICLE CONTROL UNIT

With our VCU, we network the entire vehicle with peripheral components. An Example: In eScooter sharing models, the VCU establishes the online connection to rent the vehicle via an app. Further interfaces are USB, WiFi, Bluetooth, GPS, GPRS, 3G or 4G, which can be used differently depending on the application.

[www.friwo.com](http://www.friwo.com)  
[www.emerge-engineering.com](http://www.emerge-engineering.com)

## THE NETWORKER

The VCU is used in complex vehicle wiring systems to control vehicle functions or as a gateway between separate CAN buses.

It takes on tasks such as the evaluation and control of the lighting system or provides the necessary anti-theft protection. In addition, the VCU is also suitable for „big data applications“ as it is equipped with WiFi and GPS connections to upload all collected data to a cloud.

As a complete in-house development, the functions of the VCU can be completely adapted to customer wishes and requirements.

## OVERVIEW

<b>Supply</b>	12V
<b>Interfaces</b>	USB, 2x CAN, Bluetooth
<b>Analog inputs</b>	2
<b>Digital inputs</b>	5
<b>Digital outputs</b>	2

## VIEWS





## DRIVE UNIT

In addition to our intelligent motor control, which is also available separately and can be used with other motors, we offer complete drive units. In this case our motor control is installed directly on the motor. Together they form a perfectly matched unit for the best possible driving experience.

[www.friwo.com](http://www.friwo.com)  
[www.emerge-engineering.com](http://www.emerge-engineering.com)

## PROJECT ACCELERATOR

The Emerge drive unit is a powerful unit consisting of a Motenergy motor and an Emerge 6000 motor controller with a mechanical peak power of over 6.2kW. The two components are perfectly matching each other and, with a continuous output of 5kW, provide a drive unit for exciting applications.


The drive unit can be controlled either via accelerator pedal and brake or via CAN bus. Four different driving profiles and performance classes can be selected via Bluetooth for a maximum driving experience. With the optional developer license, the drive unit can be specifically adapted to the application and customer requirements.

## OVERVIEW

<b>Applications</b>	Electric scooter, go cart, golf cart, pumps, fans
<b>Input power (el)</b>	9kW (12PS) @ 48V
<b>Output power (mech)</b>	6.3kW (8.5PS)
<b>Torque</b>	26Nm
<b>Efficiency</b>	83% @ 3500/min, 4.75kW Out, 13Nm
<b>Speed</b>	5000/min
<b>Recuperation</b>	Yes
<b>Reverse gear</b>	Yes
<b>CAN-Bus</b>	Yes
<b>Bluetooth</b>	Yes
<b>Diagnostic interface</b>	USB, CAN
<b>Weight</b>	10.9kg
<b>Diameter</b>	201mm
<b>Length</b>	146.5mm (Motor) 52.0mm (Controller)
<b>Shaft diameter</b>	24mm

## VIEWS



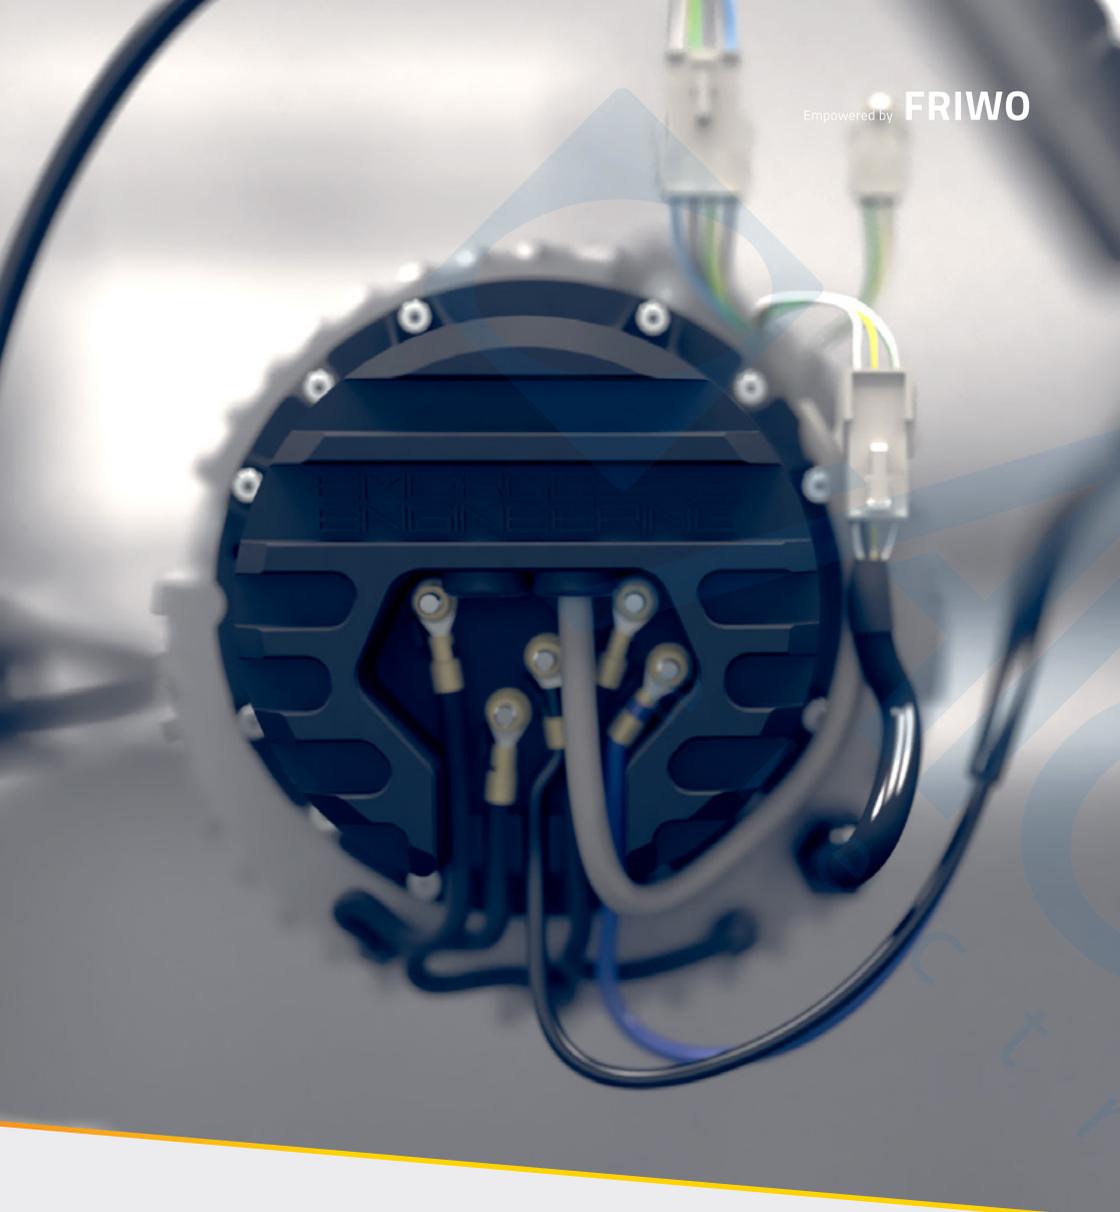

## MOTOR CONTROLLER

Our intelligent motor controller has enjoyed great success in electric scooter sharing and motor sports since 2014. In Europe more than 4000 rental vehicles are on the road that gathered millions of kilometers and a huge amount of experience. Thanks to two full race seasons in the WEC LMP1 class including the 24h of Le Mans race, the controller has proven its durability and special robustness.

## ■ HIGH QUALITY MOTOR CONTROLLER

The motor control for brushless electric drives was developed for use in light electric vehicles. Due to the small form factor, the high power up to 12kW and the best possible efficiency, we offer a high degree of freedom in vehicle development. Thanks to Bluetooth functionality and our Emerge EV App, we deliver a high-quality display solution that fits right in, basically for free.

We have developed 100% of the hardware and software ourselves and are therefore able to react quickly to customer requirements..

## ■ OVERVIEW

<b>Supply voltage</b>	14V - 65V
<b>Phase current</b>	300A
<b>Motor types</b>	PMSM
<b>Control algorithm</b>	Field oriented control with flux weakening
<b>Functions</b>	Automatic teach-in, four ride modes, reverse gear, boost, display control, smartphone app
<b>Position feedback</b>	Hall sensor
<b>Analog inputs</b>	2
<b>Digital inputs</b>	2
<b>Communication</b>	CAN, Bluetooth
<b>Diagnostic interface</b>	USB, CAN
<b>Diameter</b>	155mm
<b>Height</b>	45mm
<b>Weight</b>	914g

## ■ VIEWS





## BATTERY

Since 2013, our battery technology can be found in the large electric scooter rental fleets in Berlin, Munich, Stuttgart, Paris and Bordeaux, as well as in a wide range of industrial products. We developed the electronics and the software of the battery management system (BMS) ourselves and can react quickly to any functional requirement. With a UL certification, the BMS can be legally distributed in more than 50 countries worldwide, including the USA.

[www.friwo.com](http://www.friwo.com)  
[www.emerge-engineering.com](http://www.emerge-engineering.com)

## BATTERY PACK

Our battery packs provide the power for Europe's largest rental scooter fleets and have proven safe continuous operation and a long service life in more than 5,000,000 km and more than 150,000 hours of charging.

24/7 continuous operation requires a robust battery management system (BMS) to ensure high safety and availability. Since we have developed 100% of the BMS electronics and software ourselves, we can react flexibly to special customer requirements and special functions.

## OVERVIEW

<b>Energy</b>	2216 Wh
<b>Cell type</b>	Samsung INR 18650 35E
<b>Cell config</b>	14S 12P
<b>Nominal voltage</b>	50.4V
<b>Voltage range</b>	30V - 59V
<b>Cont. current</b>	50A
<b>Peak current</b>	65A
<b>12V output</b>	1.6A
<b>Standby</b>	<0.1mA
<b>Digital inputs</b>	Keylock (Enable), Charger
<b>Communication</b>	CAN-Bus
<b>Diagnostic interface</b>	USB, CAN
<b>Dimensions</b>	268mm x 76mm x 378mm
<b>Weight</b>	10kg

## VIEWS





## SERVICE SOFTWARE

For long-term driving pleasure, appropriate control and maintenance of a drive system is essential. Our self-developed service software accompanies your vehicle throughout its entire lifetime: from the development phase through series production to fault analysis in the workshop.



[www.friwo.com](http://www.friwo.com)  
[www.emerge-engineering.com](http://www.emerge-engineering.com)

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | [info@alcom.be](mailto:info@alcom.be) | [www.alcom.be](http://www.alcom.be)  
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | [info@alcom.nl](mailto:info@alcom.nl) | [www.alcom.nl](http://www.alcom.nl)

## ■ SERVICE POWER

A lot happens during the life of an electric vehicle.

Everything starts with the development process. In order to provide the best possible support for your R&D, we supply the software to make settings on our control units, manage different versions of this data and safely carry out assembly from the prototype to the larger vehicle fleet.

During series production, the Enable-Tool supports the calibration of control units, the commissioning of electrical systems and stores protocols in databases.

Even an electric vehicle has to be serviced. We have already developed the infrastructure to set up your dealer network. Our control units are equipped with a USB diagnostic interface to give service staff access to the fault memory or to carry out firmware updates.

We currently offer the Enable-Tool NG exclusively as an annual fleet licence, which can be variably distributed among the developer and service user roles.

## ■ OVERVIEW

<b>Interface</b>	USB
<b>System requirements</b>	Microsoft Windows, Dualcore CPU @ 1.8 Ghz, 2GB RAM, 100MB HDD
<b>Features depending on user role</b>	see below:
<b>Read fault codes</b>	Service and developer
<b>Change parameters</b>	Developer
<b>Create datalog</b>	Service and developer
<b>Create data snapshot</b>	Developer
<b>Transfer data snapshot on a certain OEM ECU</b>	Service
<b>Transfer data snapshot all OEM ECUs</b>	Developer

## ■ VIEWS

