



LED POWER SUPPLY DATASHEET

SNP30-24VF-2

·Description

Linear type, helpful for profile lighting and lightboxes. SELV, short circuit, overload and restart function. Compliance to ERP directive, lifetime 30,000hrs.



·Input

Items	Conditions	Request	Note	
Input voltage	Ta	200-240Vac	--	
Input frequency		50Hz/60Hz	--	
Input current	25°C, rated input voltage, output with max. rated power	< 0.22A	--	
Input power		< 37W	--	
Efficiency		≥ 85%	--	
Standby		25°C, rated input voltage, output without load	<0.5W	average
Inrush current		25°C, rated input voltage	<60A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.9	--	

·Temperate and others

Item	Conditions	Request	Note
Operation temp.	--	-20°C~45°C	--
Relative humidity	--	45%~85%	--
Max. case temp.	--	85°C	--
Lifetime	Max.Ta, rated input voltage, output with max.rated power	30,000hr	--
Working noise	25°C, rated input voltage, output with rated power, mute box background noise<35dB, pickup 10cm distance from products	yes	--

·Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta, 0.94-1.06 times of input voltage, 1.4 times of rated power	yes	--
Short circuit	Ta, 0.94-1.06 times of input voltage	yes	--
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	--	--
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	--	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over heat re-start after cut off	--	--

·Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with max. rated power	<0.5S	--
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	--
Output current range	Ta, rated input voltage	0-1.250A	
Output voltage wave	25°C, rated input voltage, output with max. rated power	250mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--


·Mechanical, mounting

Items	Conditions
Case material and size	Plastic, 251mm×30mm×16mm
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Output connection mode	Terminal block
Output connection mode	Terminal block
Output cables length	

·Standard

Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	IEC61000-3-2
EMI	IEC55015
EMS	IEC61547

Dimensions(mm)

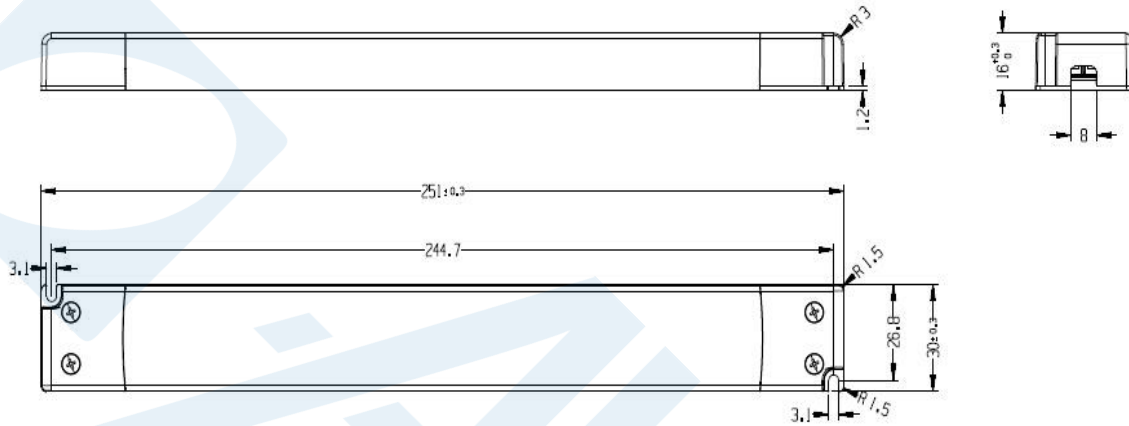

Wiring Diagram

