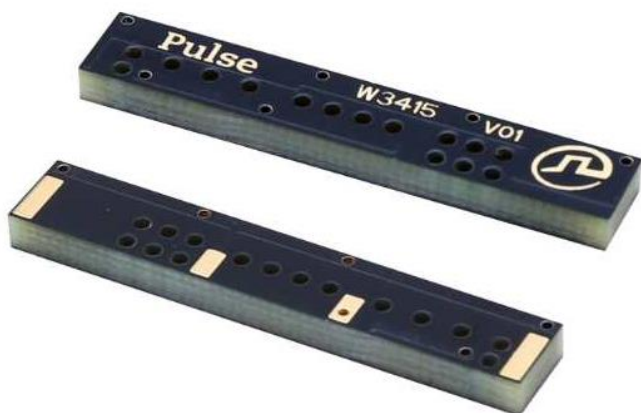


TECHNICAL DATA SHEET
Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

Features:

- 4G/5G antenna
- Frequency 617-6000MHz
- Gain 0 / 2.5dBi
- Size 40 x 7 x 3 mm
- Fully SMT compatible
- Tape & Reel packing
- MSL-3

Applications:

- Broad band antenna, combines all sub 6GHz 4G and 5G bands
- Devices requiring high performance compact internal 4G/5G antenna
- Suitable for 2xMiMo use when mounting two pcs W3415 onto radio board

All dimensions are in mm / inches

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

ELECTRICAL SPECIFICATIONS

Antenna Type	PCB
Frequency	617-960/1400-6000MHz
Nominal Impedance	50 Ω
Return Loss	<-4
Radiation Pattern	Omni
Gain 698~960MHz	-1 to 1dBi
Gain 1400~6000MHz	1 to 5dBi
Efficiency 617~960MHz	>40% typical
Efficiency 1400-6000MHz	>45% typical
Polarization	Linear
Power Withstanding	2W

MECHANICAL SPECIFICATIONS

Color	Black
Size	40mm(L) * 7mm(W) * 3mm(T)
Weight	1.65 g
Fixing system	SMT
MSL (MOISTURE SENSITIVITY LEVEL)	3

ENVIRONMENTAL SPECIFICATIONS



Operating Temperature	-40 ~ +85° C
Storage Temperature	-40 ~ +85° C
RoHS Compliant	Yes

Description: 617-6000MHz SMD 4G/5G IoT Antenna


Series: Composite SMD Antenna

PART NUMBER: W3415

MECHANICAL DRAWING

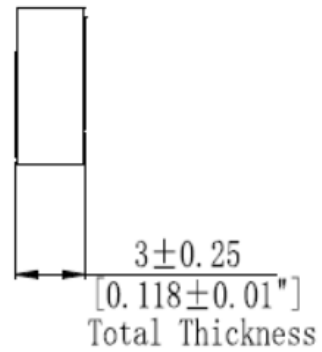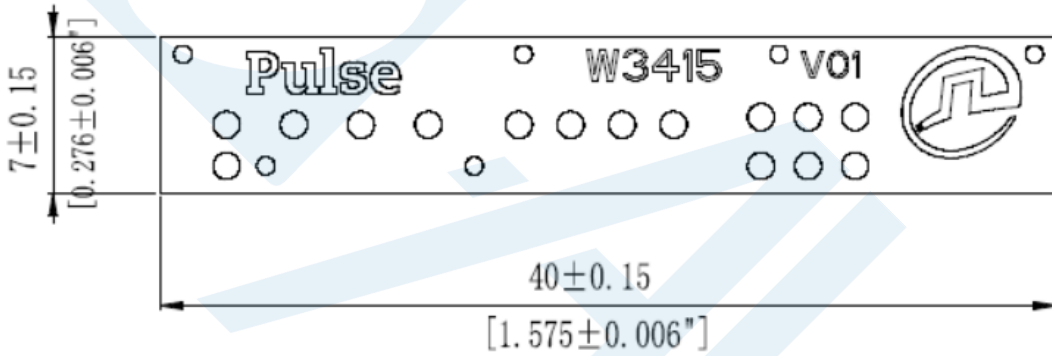

Front View

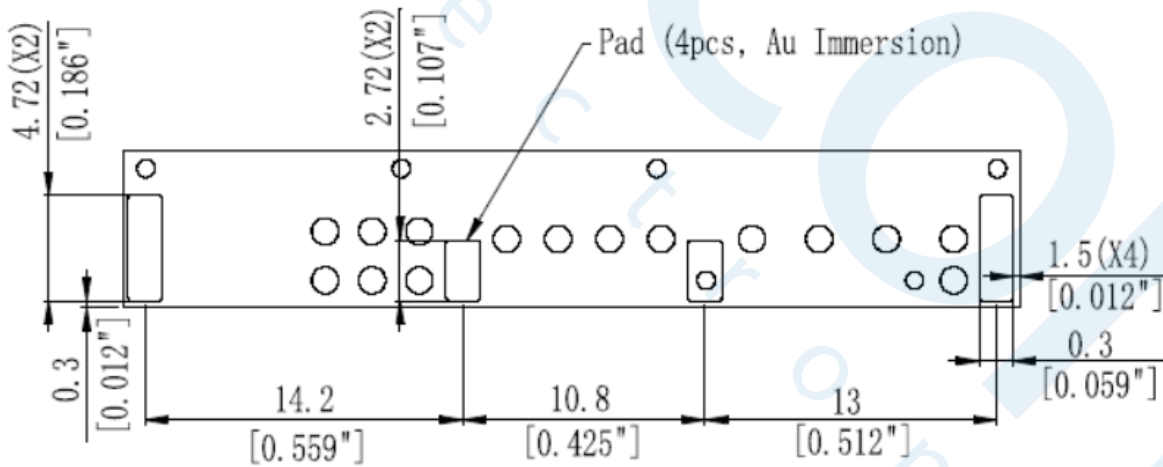

Back View

Unit: mm[in]

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile

presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

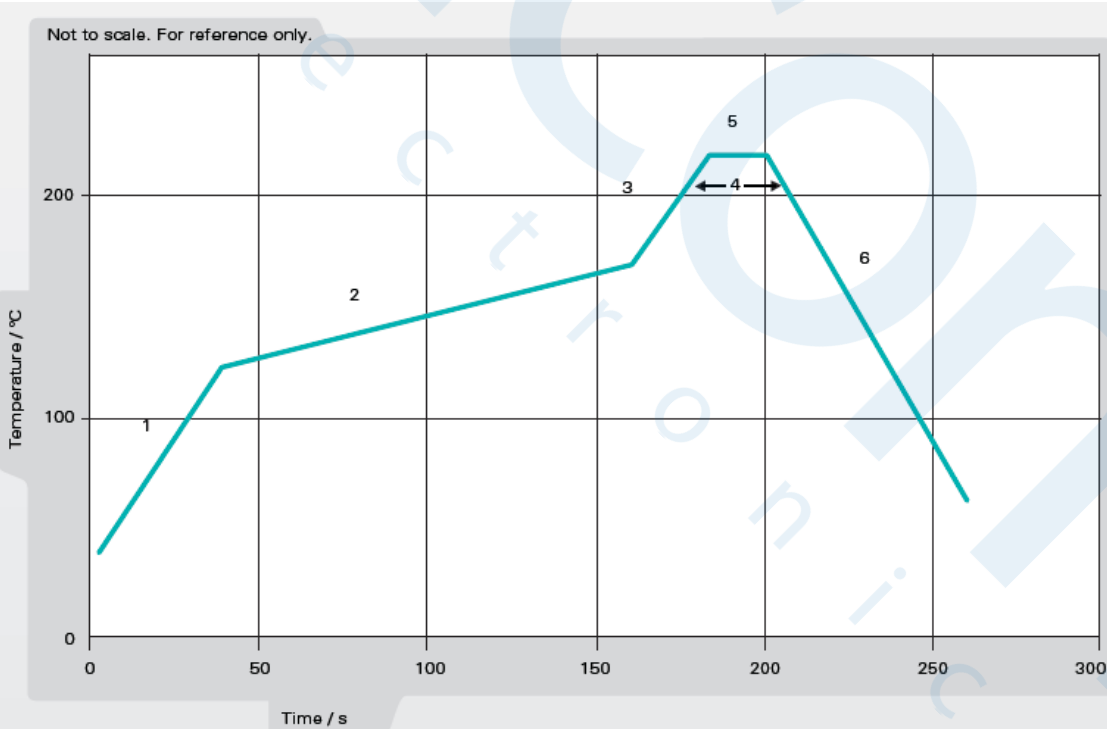


Figure 1. Minimum temperature profile recommendation for reflow soldering process

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

Recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

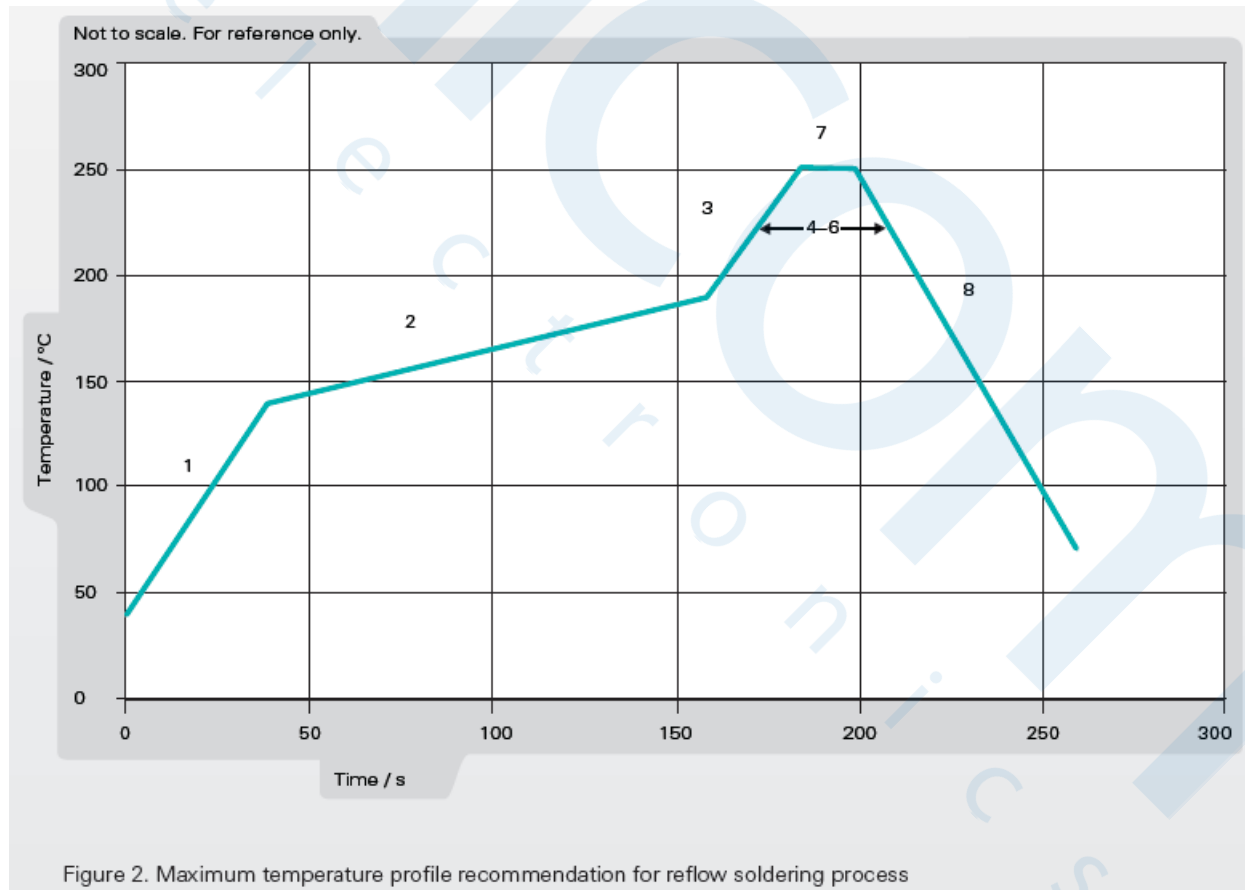

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

TEST SETUP

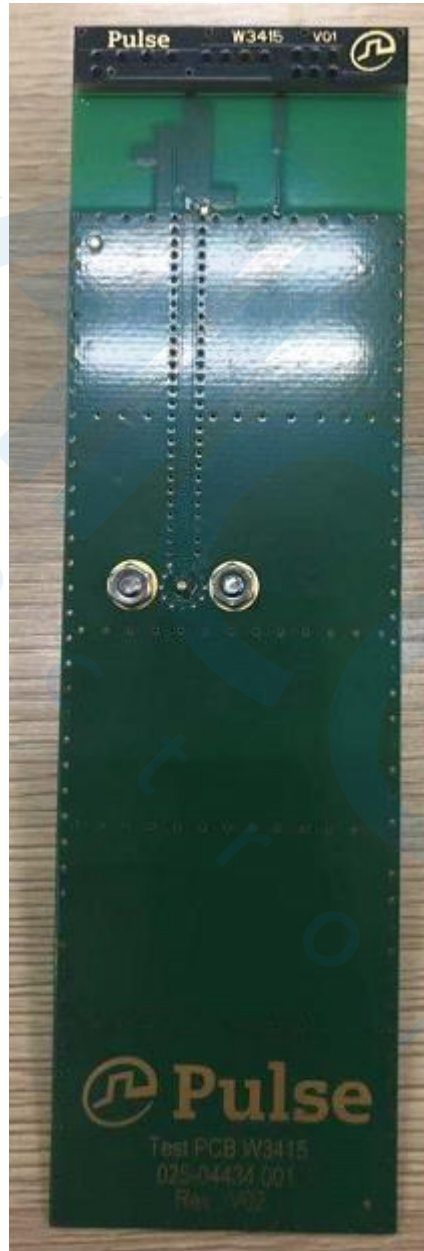

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna


PART NUMBER: W3415

TEST SETUP

Pulse reference test PCB for W3415 antenna

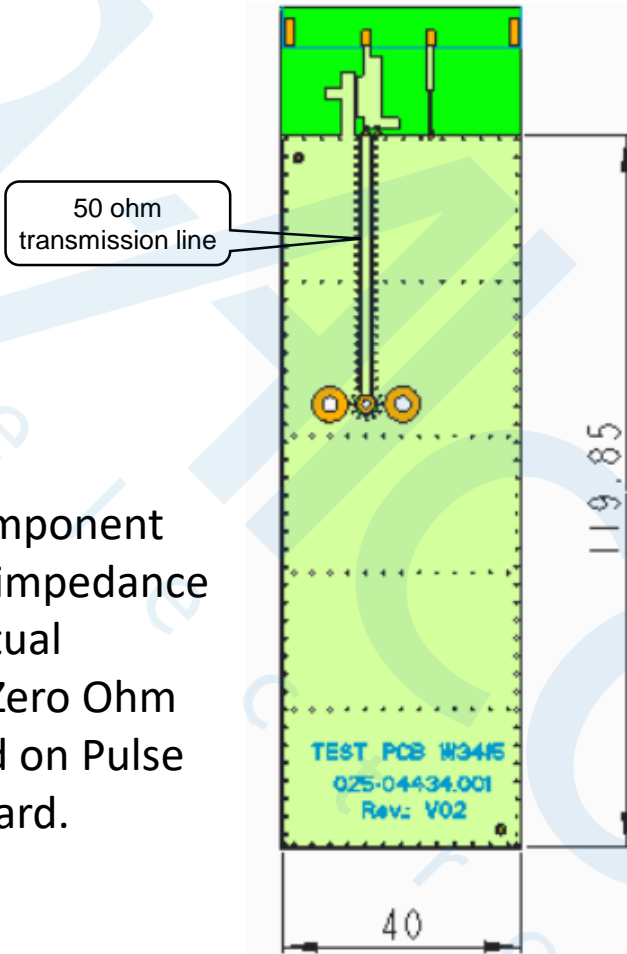

Matching component reserved for impedance tuning on actual application. Zero Ohm jumpers used on Pulse reference board.

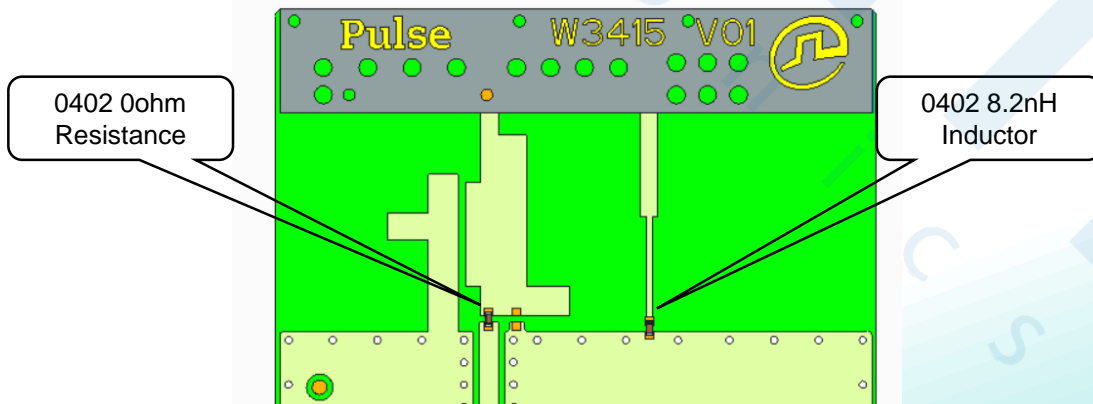

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

TEST SETUP

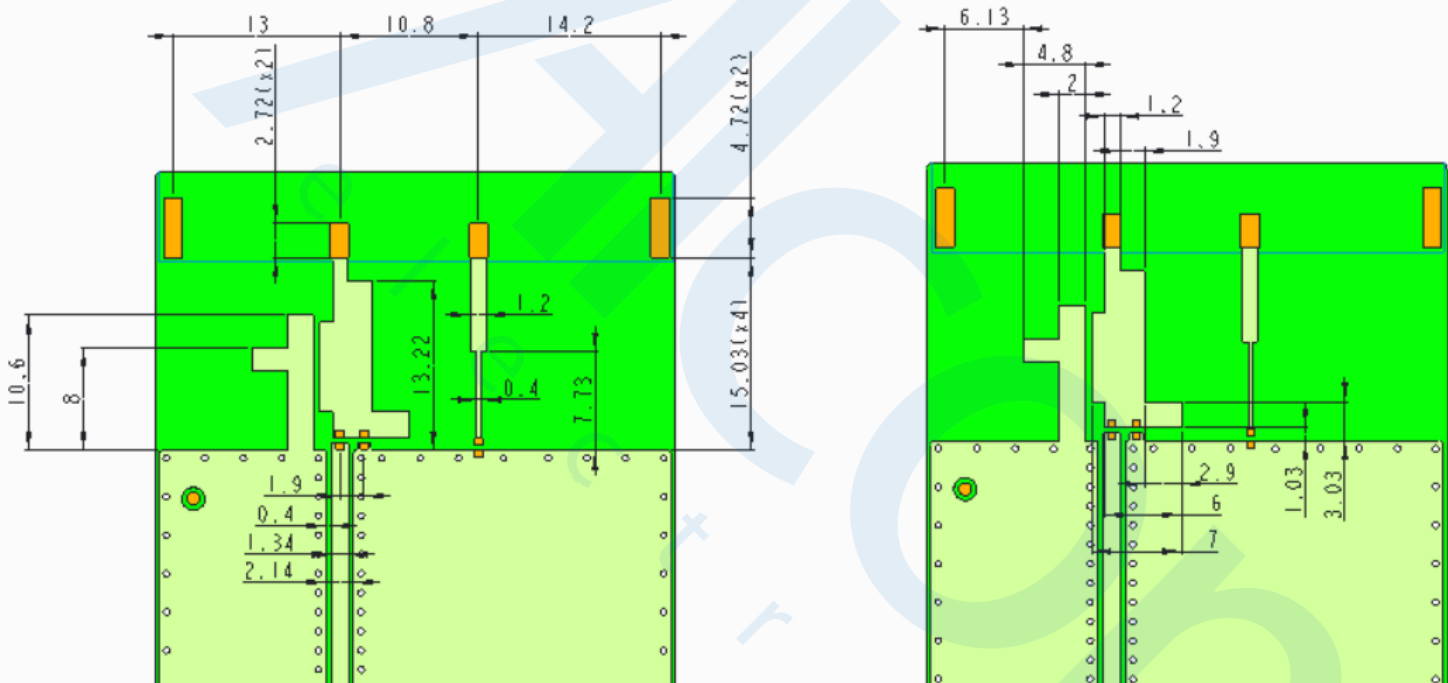

Recommended test board PCB layout for electrical characteristic measurement.

Substrate material: ISOLA 185HR.

Total thickness: 1mm

All dimensions are in mm

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

CHARTS

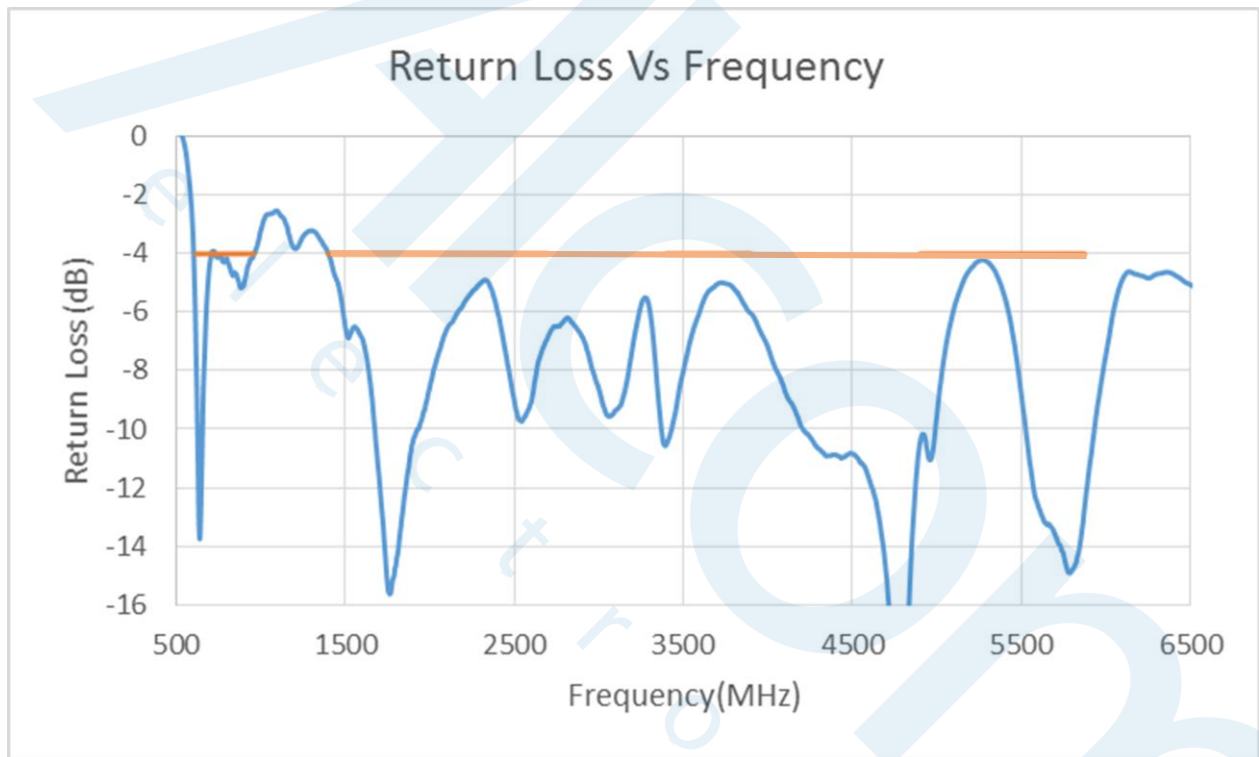

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna


PART NUMBER: W3415

CHARTS

Gain(dBi)

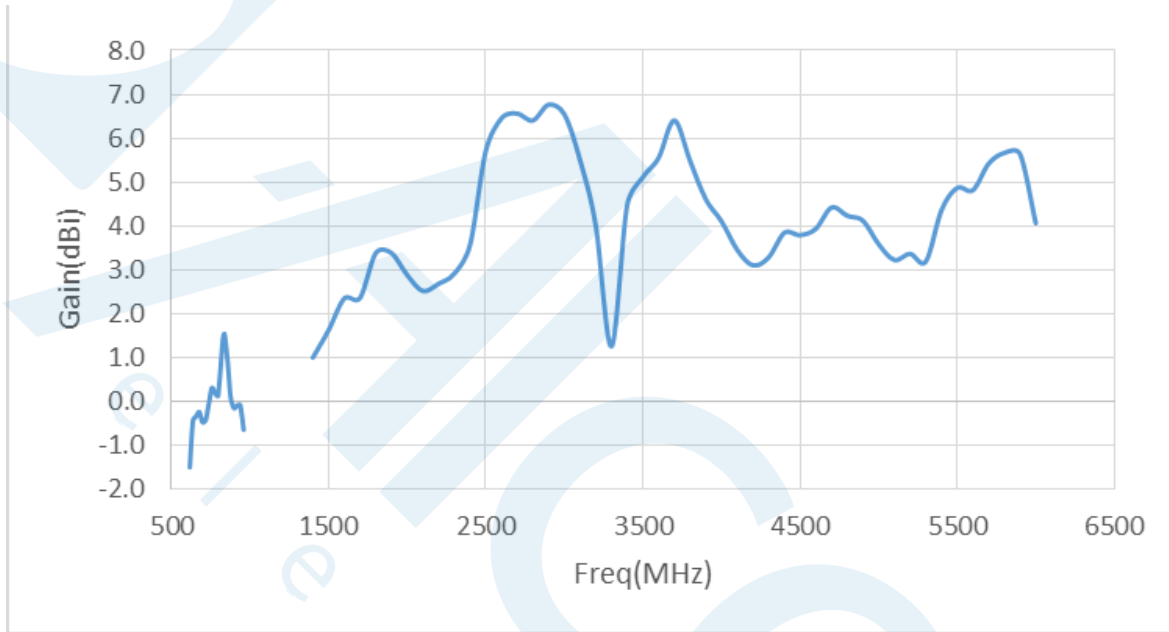

Efficiency(%)

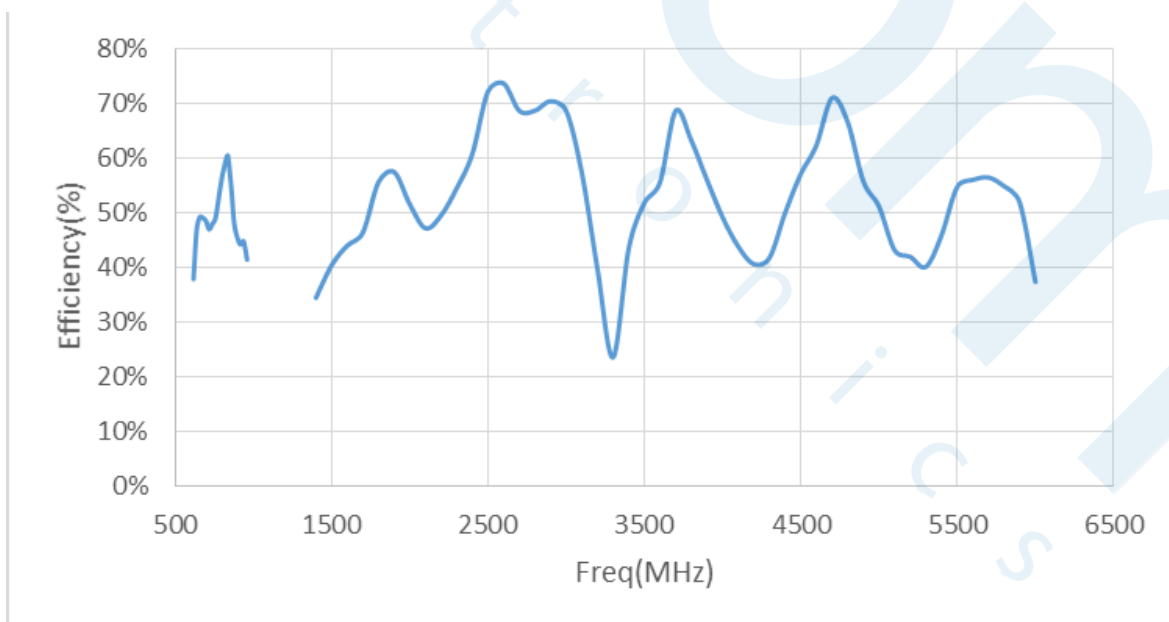

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION




This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

CHARTS

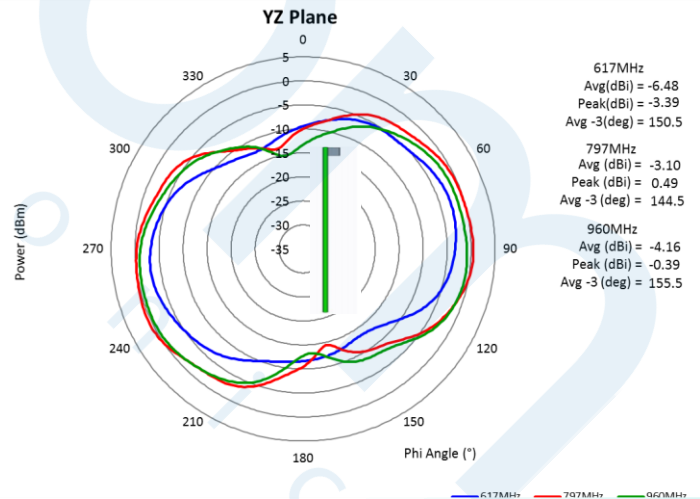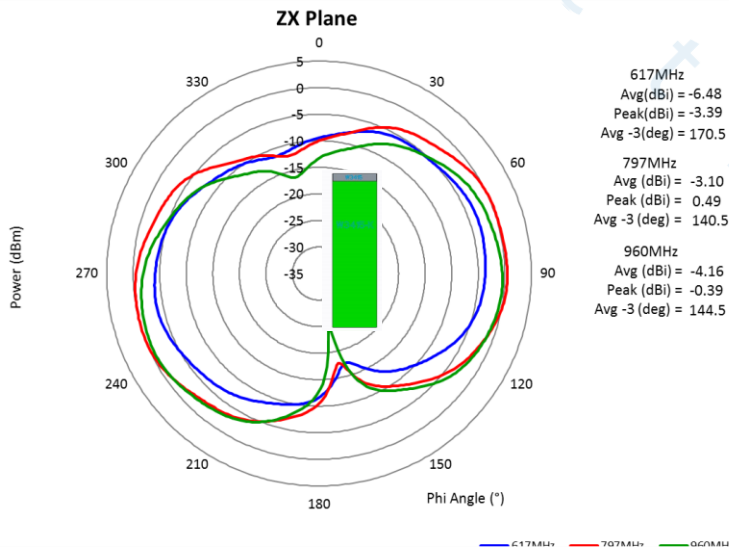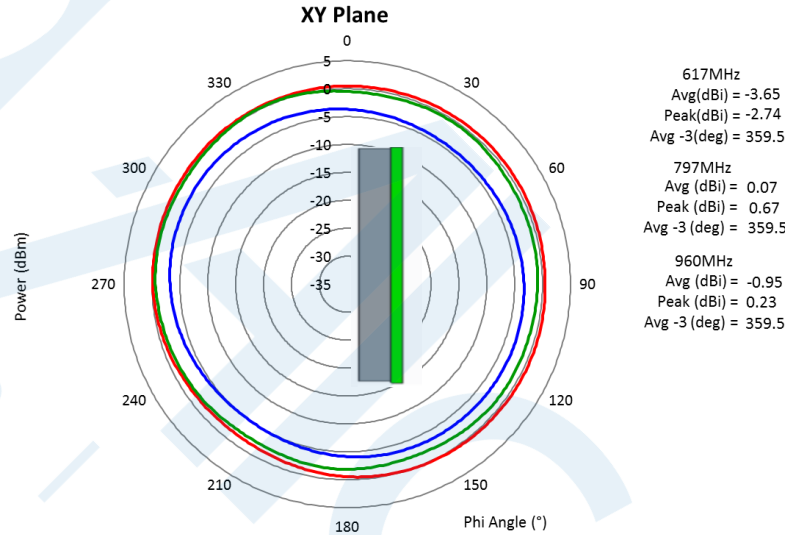

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION




This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

CHARTS

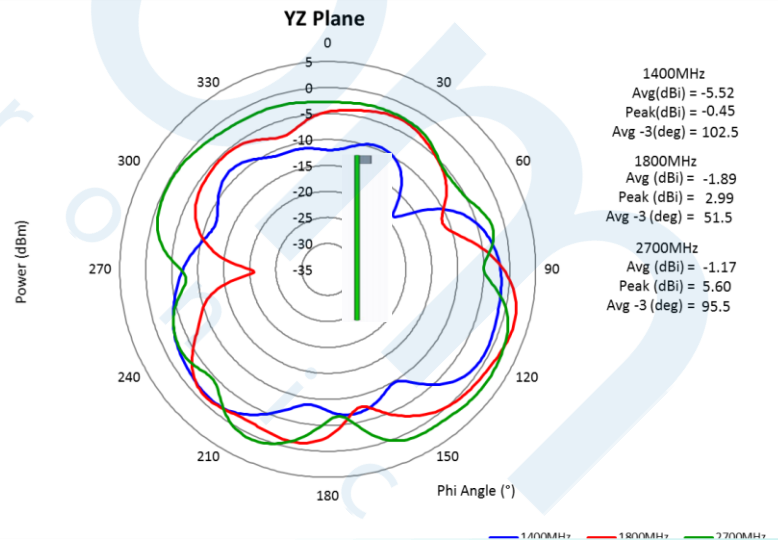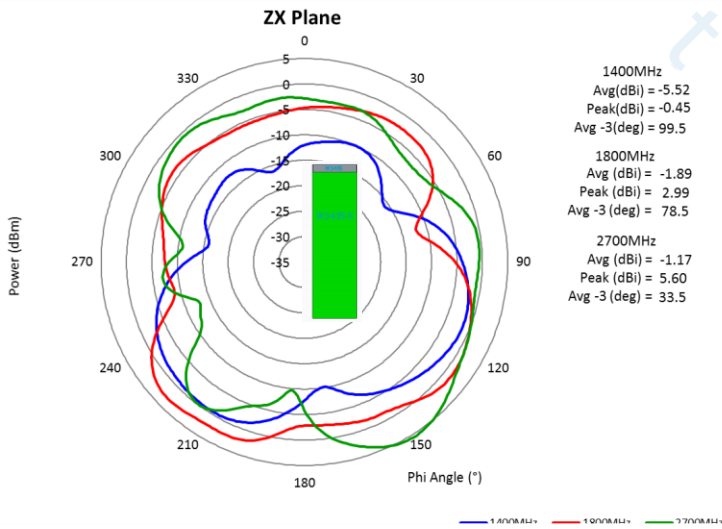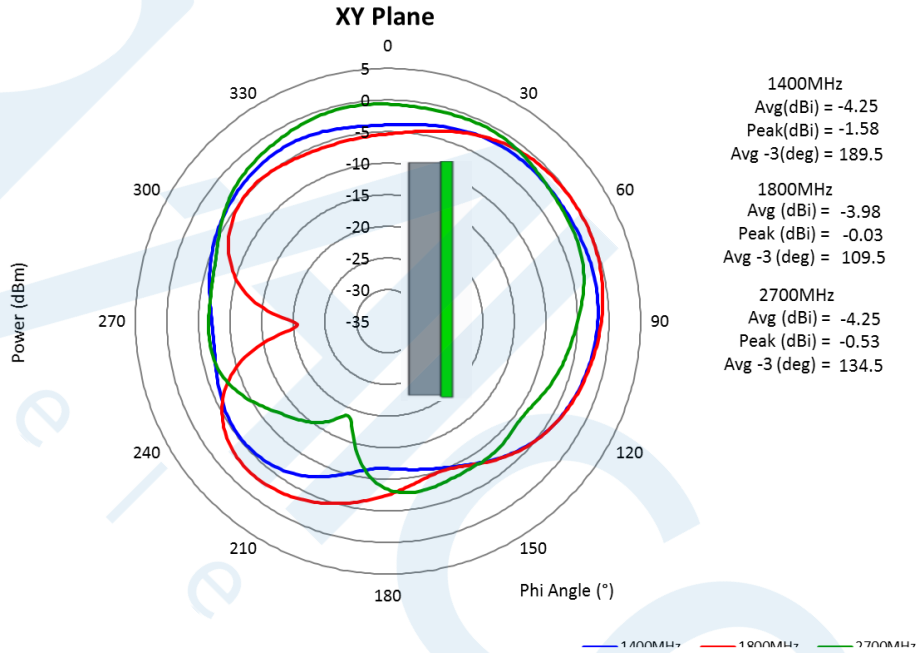

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna


PART NUMBER: W3415

CHARTS


XY Plane

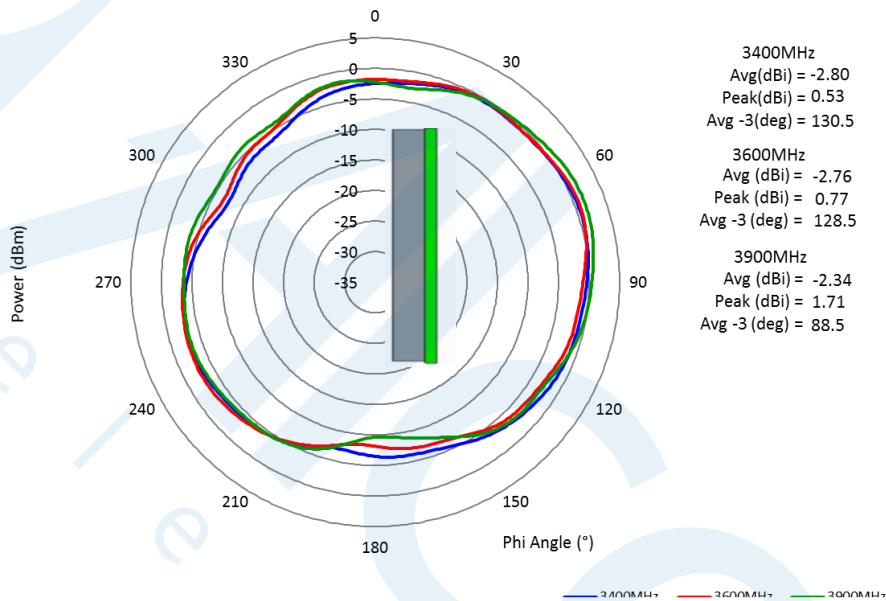

ZX Plane

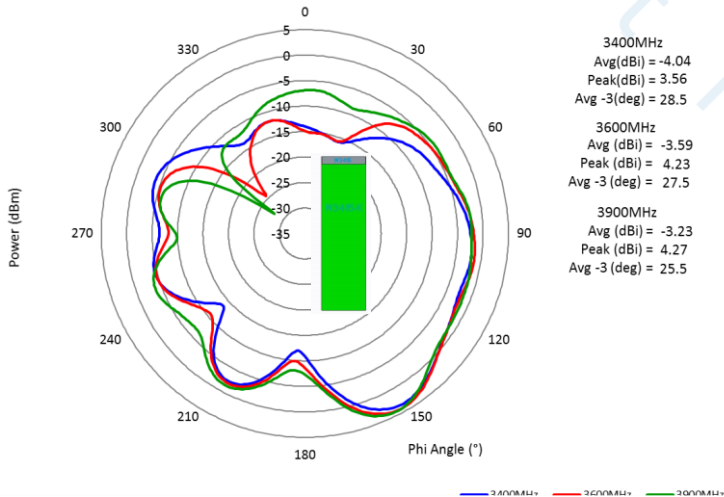

YZ Plane

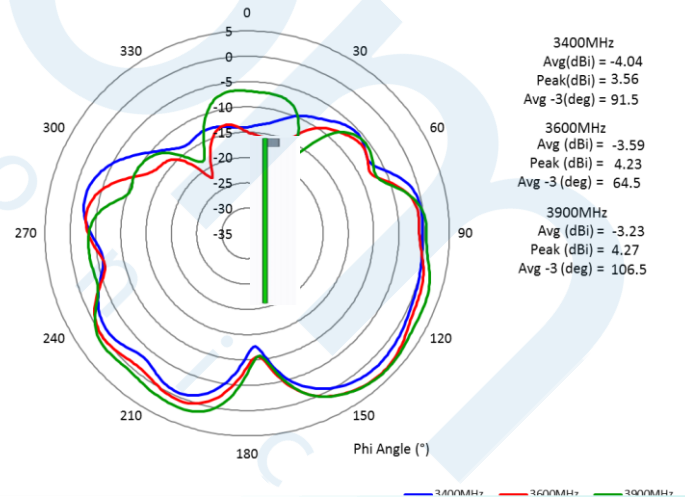

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION




This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

CHARTS

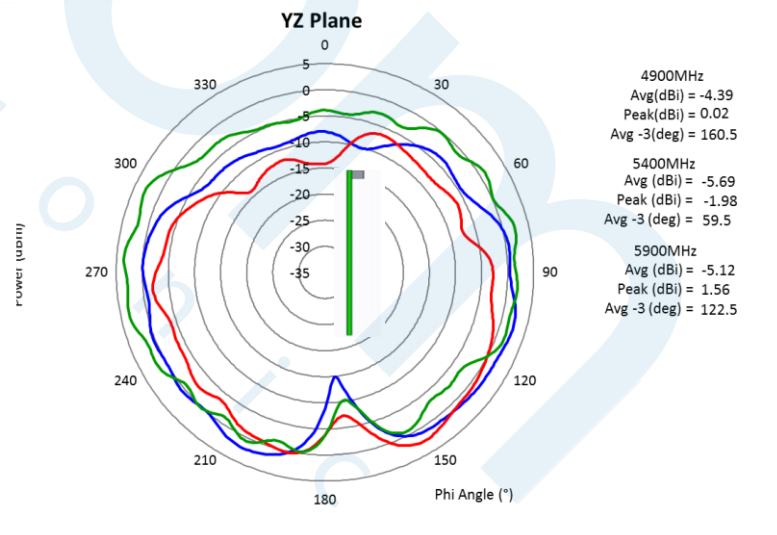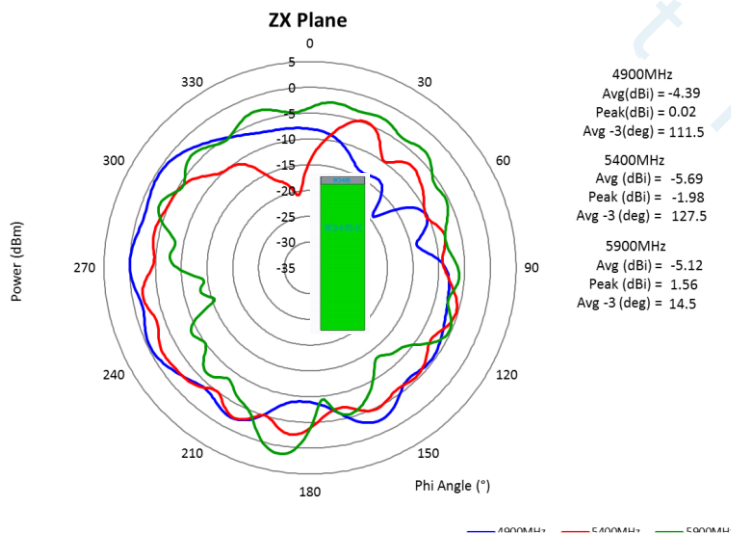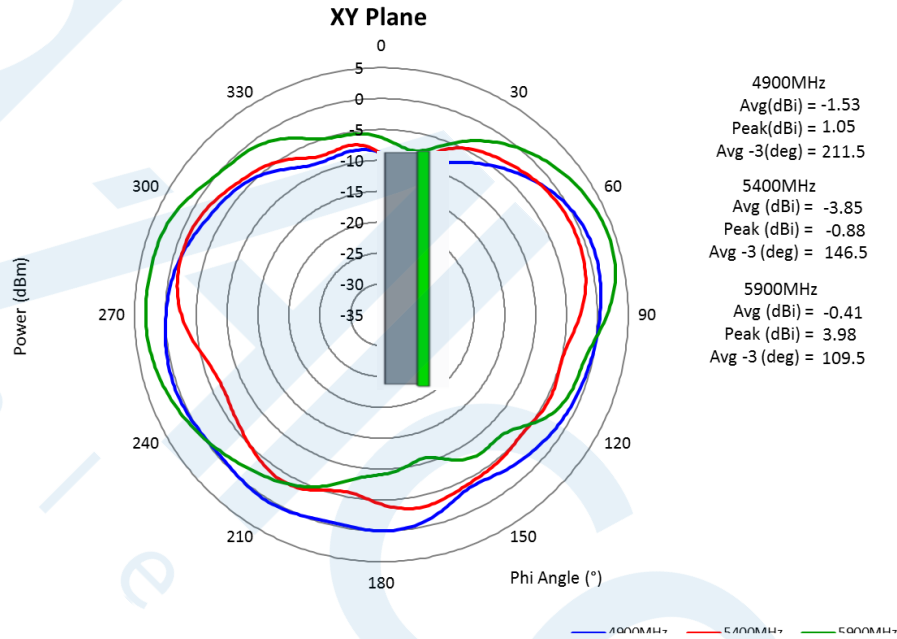

Issue: 2024

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.




Description: 617-6000MHz SMD 4G/5G IoT Antenna

Series: Composite SMD Antenna

PART NUMBER: W3415

PACKAGING

1000pcs Antennas Per 1pcs 13" Tape & Reel
2 pcs 13" Tape & Reel (total 2000pcs Antennas) per 1 box

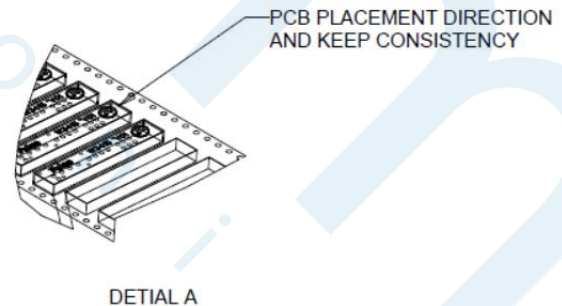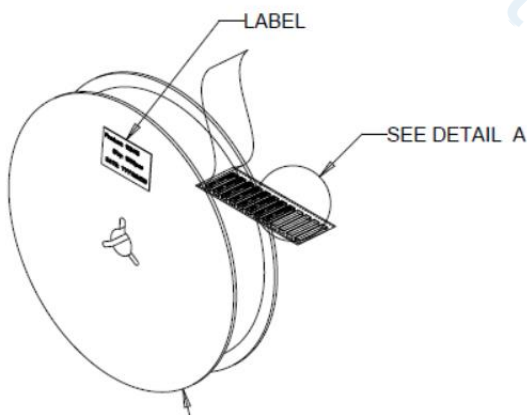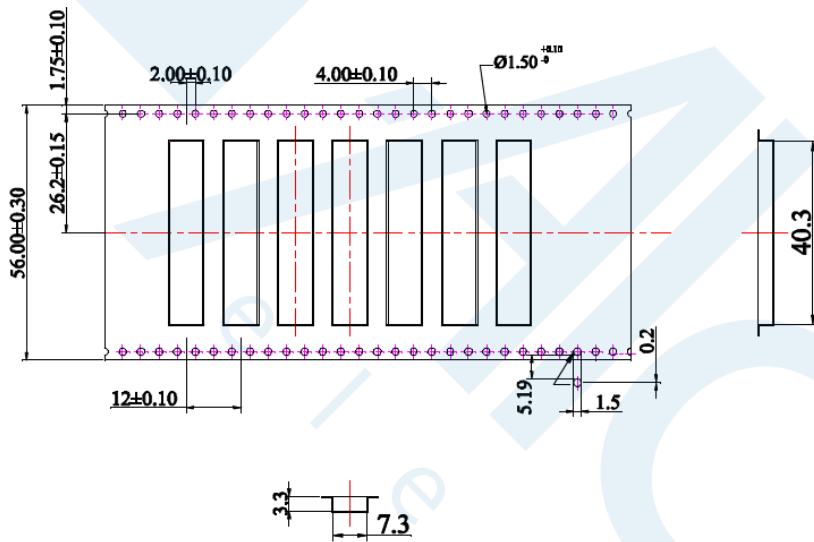

- (1) 13" TAPE & REEL, 1000PCS / REEL AND EACH REEL SEALED WITH A VACUUM BAG (075-03363.001)
- (2) 2 REELS OF PRODUCTS (TOTAL 2000PCS PRODUCTS) PACKED IN ONE CARTON.