



LED POWER SUPPLY DATASHEET

SL240-48VF

-DESCRIPTION

M M 110 SELV        

-Input

Items	Conditions	Request	Note
Input voltage	Ta	AC200-240V	--
Input frequency		50/60Hz	--
Input current	25°C, rated input voltage, output with max. rated power	< 1.8A	--
Input power		< 270W	--
Efficiency		≥ 93 %	--
Standby	25°C, rated input voltage, output without load	<0.21W	average
Inrush current	25°C, rated input voltage	<75A	peak
PF	25°C, rated input voltage, output max. rated power	≥ 0.95	--

-Temperate and others

Item	Conditions	Request	Note
Operation temp.	--	-20-45°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	90°C	--
Lifetime	Max.Ta,rated input voltage,output with max.rated power	30,000hr	--
Working noise	25°C,rated input voltage,output with rated power ,mute box background noise<35dB,pickup 10cm distance from products	yes	--

-Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta ,0.94-1.06 times of input voltage, 1.6 times of rated power	yes	--
Short circuit	Ta ,0.94-1.06 times of input voltage	yes	--
Over temperature	Ta ,0.94-1.06 times of input voltage, temperature detected point more than 115 degree	yes	--
Over voltage	Ta ,0.94-1.06 times of input voltage,output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	yes	--
Latch off	Over voltage, over heat re-start after cut off	yes	--

-Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage,output with max. rated power	<0.5S	--
Output voltage and precision	Ta , rated input voltage, output with rated power	48V±5%	--
Output current range	Ta ,rated input voltage	0-5A	
Output voltage wave	25°C, rated input voltage,output with max. rated power	480mV	Vp-p
Output overload	25°C,rated input voltage,output with 2 times LED load	yes	--
Output current and precision	Ta , rated input voltage, output with rated power	--	--
Rated output voltage range	Ta , rated input voltage,	--	--
Output current wave	25°C, rated input voltage,output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--


-Mechanical, mounting

Items	Conditions
Case material and size	Plastic case
Mounting ways	independent
Insulation type	Class II
IP grade	IP20
Input cable	H05VVH2-F 2*1.0mm ²
Output cable	H05VVH2-F 2*1.0mm ² *2
output cable length	Max 2000mm

-Standard

Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	EN61000-3-2 Class C
EMI	EN55015
EMS	EN61000-4-2、3、4、5、6、8、11 EN61547

● Dimensions(mm)

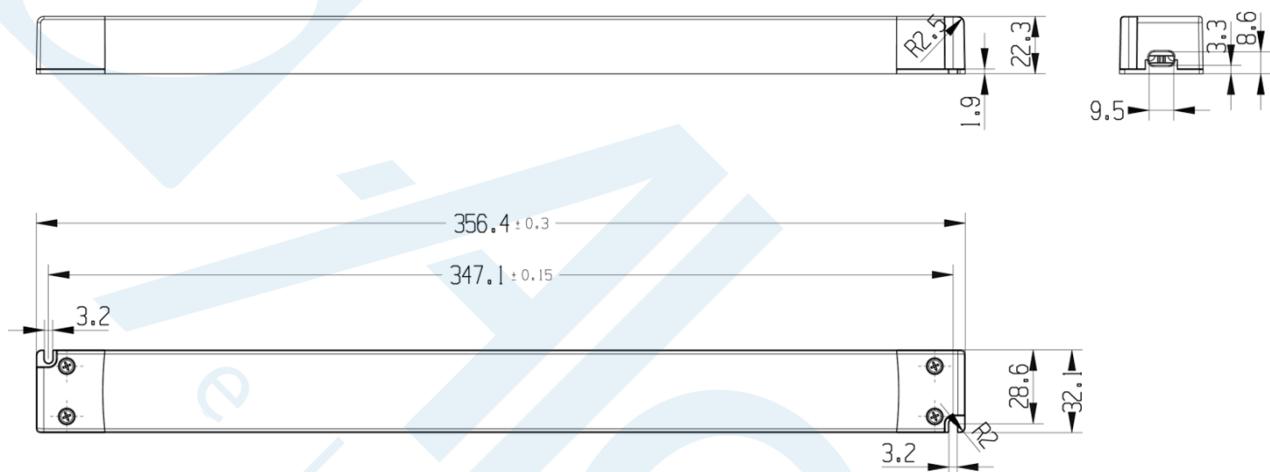

● Wiring Diagram

